



Instruction **PINBOARD** Size 50 x 60 cm



Materials from Gütermann

- Sew-all thread in matching colours
- Cotton fabric 145 cm wide, collection BLOOMS:
- 1.30 m palm leaf pattern in white-green
- 0.20 m floral ornament pattern white-green

In addition

- 0.60 m volume fleece H630, 90 cm wide
- 1.30 m iron-on fabric lining G700, 90 cm wide
- Textile adhesive
- 2 screw hooks
- Screw hanger for the pinboard
- Plywood board, 60 x 50 cm, 7 mm thick
- Pattern paper

Tools

- Sewing machine
- Iron
- Scissors
- Pins
- Ruler
- Tape measure
- Staple gun with staples
- Handsaw
- Screwdriver

Preparation

Draw a 20 cm x 16 cm rectangle for the triangles on the envelope pocket. Draw in the diagonals and cut out the resulting triangles.

Cutting

- Flower ornament pattern: 4x triangles plus 1 cm seam allowance (2 each, normal and mirrored)
- Palm leaf pattern: pinboard 124 cm x 66 cm (incl. 8 cm allowance)
- Fabric lining: pinboard 124 cm x 66 cm; 2x triangles plus 1 cm allowance (normal and mirrored)
- Volume fleece: 60 cm x 70 cm





1. Draw the point on the pinboard onto the board using the pattern and cut it using the handsaw. Sand the edges and the point. Lay the board onto the volume fleece so that the fleece extends beyond it for 5 cm on the lower and side edges. Draw the angled sides of the board onto the fleece with 5 cm allowance and cut. Apply adhesive to the edges of the fleece and fold them onto the back of the board. Weigh these sections down until the adhesive dries.



2. Iron the lining fabric to the reverse of the pinboard fabric and the two triangles for the envelope pocket. In order to do this, lay a damp cloth on top and press the iron down in 12-second steps. Lay flat and leave to cool for approx. 30 minutes. For the envelope pocket lay 2 triangles right sides together (1 with lining, one without) and stitch along the edges, leaving a 5 cm slit along the lower edge to turn the piece inside out. Cut back the seam allowances and cut them away at the corners at an angle. Iron the seam and turn the triangle inside out. Form the edges well. Sew along the narrow side, close to the edge. Process the second triangle in the same way. Slide the triangles together to make the envelope and pin in place.



3. Mark the 8 cm allowances on the lower and side edges of the pinboard fabric. Starting at the lowest point mark 24 cm and 8 times 8 cm. Fold the fabric across with the wrong side together at the 24 cm mark to make the edge of the 1st pocket inlet. Iron the fold and sew along it, close to the edge. Make a fold across the fabric, 8 cm deep (lower edge of the pocket) and pin the fabric together. Iron the lower edge in place. Iron the 2nd pocket inlet 8 cm away from the first and sew along it, close to the edge. Then pin and iron a fold across the fabric again with a depth of 8 cm. Iron the 3rd pocket inlet like the 2nd at a distance and depth of 8 cm and sew this. Pin or tack the pockets onto one another.



4. Mark a diagonal line from the side corner points on the 3rd pocket inlet to the centre top. Cut the fabric away along this diagonal.






5. Pin the envelope pocket onto the pinboard in accordance with the dimensions on the pattern. Sew it in place, close to the edges, along the vertical and lower edges, thereby closing the slits on the lower edges. Sew vertical separating seams over the pocket folds to make pockets parallel to the vertical outside edges, 16 cm away from the outer edges or at any interval you prefer.



6. Lay the pinboard cover on the work surface with the right side facing down. Then lay the board on top of it in the centre of the allowances. First fold the opposite parallel sides onto the reverse and staple them down, followed by the lower edge. Then fold the point of the allowance down horizontally and staple it in place. Fold the angled sides over this and staple all the fabric edges in place. Fix two screw hooks into the front. Attach a hanger to the back.

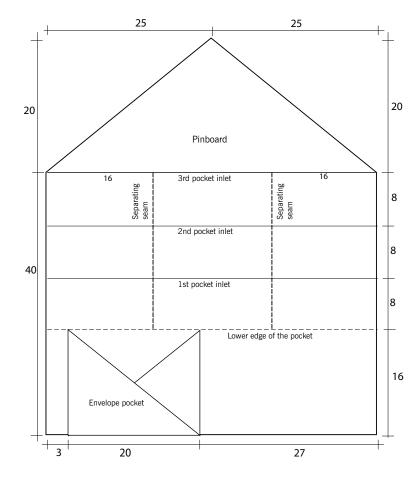

Gütermann GmbH

Landstr. 1

DE-79261 Gutach-Breisgau Tel +49 7681 21-0

Fax +49 7681 21-449

contact@guetermann.com

