



EN



Degree of difficulty

Instruction **DOORSTOP**

Instruction DOORSTOP



Materials from Gütermann

- Sew-all Thread in matching colours
- Deco Stitch 70 in Col. 8 and Col. 112
- Opt. textile adhesive HT2

In addition

- Cotton fabric 145 cm wide:
 - 0.60 m grass pattern in grey-turquoise-white-beige,
 - 0.60 cotton fabric in solid colour
- 0.10 m faux leather in beige, 90 cm wide
- 0.60 m fabric lining G 700, 90 cm wide
- 0.60 m Non Woven fabric H 630, 90 cm wide
- 8 silver rivets with \varnothing 0.8 cm
- 2 half rings in silver with \varnothing 3 cm
- Approx. 1 kg cherry pits
- Approx. 100 g cotton wool filling
- 0.05 m Vliesofix
- 0.05 m Non Woven backing

Tools



- Sewing machine
- Iron and iron cloth
- Scissors opt. roller cutter
- Ruler
- Tape measure
- Set square, ruler
- Tailor's chalk or fabric marker pen
- Pins and clips
- Hammer

Size 16 x 16 x 16 cm (L x W x H)

Cutting


- Grass pattern: 48 x 48 cm outer side cube 1x; 16 x 16 cm cover area 1x
- Cotton fabric: 48 x 48 cm lining cube 1x; 16 x 16 cm cover area 1x
- Fabric lining: 48 x 48 cm outer side 1x; 16 x 16 cm cover area 1x
- Non Woven: 48 x 48 cm lining 1x; 16 x 16 cm lining 1x
- Faux leather: 46 x 2 cm handle 2x; 5 x 2 cm bar 4x (without seam allowances)
- Vliesofix: 46 x 1.8 cm handle 1x; 5 x 1.8 cm bar 2x (without seam allowances)

Cut all parts with a 1 cm seam allowance.

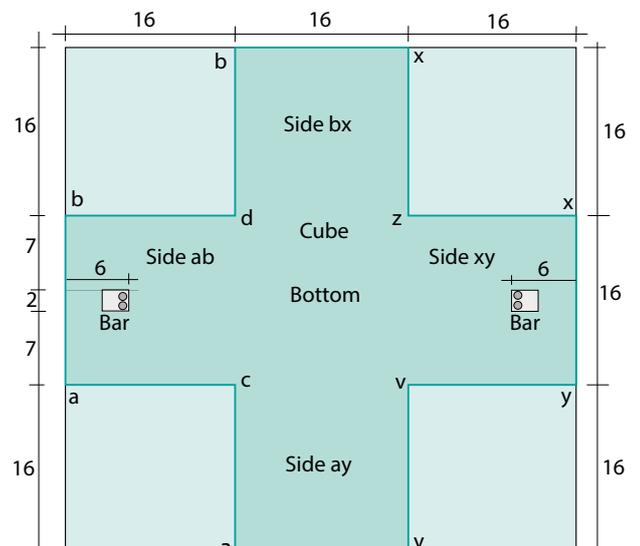




1. Place the fabric inlay with the coated side facing down flush on the left fabric side of the cube and the cover area. Press on with a damp ironing cloth placed over it in 12-second steps, do not slide the iron. Leave to cool flat for 30 minutes. Slide the Vliesofix strips between the handle strips and bar strips on the left. Iron with an ironing cloth on top, then allow to cool. Place the Non Woven with the coated side on the lining and the cover areas and press on with a damp ironing cloth in 15-second steps. Leave to cool flat for 30 minutes.

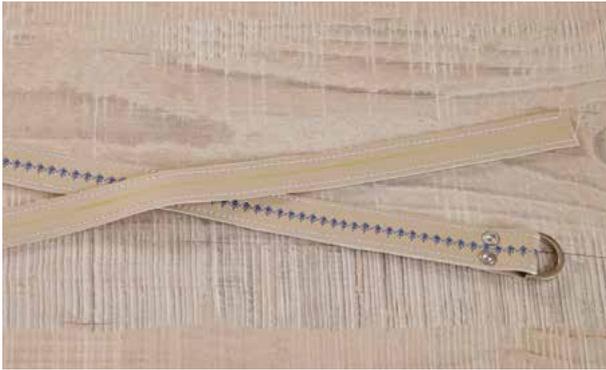

2. Mark a line in the middle of the handle and stitch on a top stitch seam with blue Deco Stitch 70. It is best to place a remainder of the Non Woven backing underneath and try out the stitch on the remainder in advance. Then stitch with Deco Stitch 70 in beige at a distance of 2 mm from the longitudinal edges in a triple straight stitch, stitch length 3.5 mm.

Tip: Move the needle as far to the left as possible, place the foot on the left edge of the strip so that the distance is 2 mm.

Also quilt the two bars in triple straight stitch with narrow edges. Fold the ends of the handles 3.5 cm wide by one half ring each onto the left side. Secure with clips or a textile adhesive spot. Attach the ends to the handle with 2 rivets each.

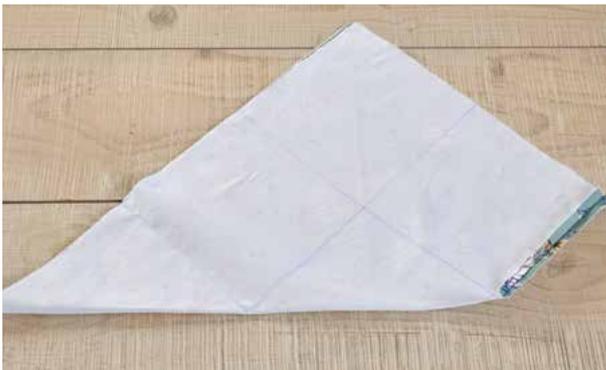

3. Use a ruler and marker to draw the markings for the quilting lines on the 16 cm grid (see schematic drawing) on the inside of the cube's outer fabric. Fold "x to x" for the corners, stick the edges on top of each other and quilt along the marking to z, leaving the seam allowance open at the start of the seam. Cut back the fabric to 1 cm, cut into the tip slightly and iron apart the seam allowances. Proceed in the same way in all 4 corners. Fold the bottom edges zv, vc, cd and dz left on left and iron in the breaklines from corner to corner.



4. Also mark the lining cube with the marking lines as described in step 2. Quilt the corners according to the instructions, cut back and cut into the fabric, iron apart the seam allowances. For the lining, iron the bottom edges in the same way as the cube, folding the lining left to left.



5. Fold the edge bx of the cover area in seam allowance width to the left side and iron in. Pin the edge xy of the cover area along the cube edge xy and stitch in seam allowance width. Then also stitch the edges ya and ab together from corner to corner. Iron the combined seam allowances towards the cube sides. Work the cover area of the lining in the same way.



6. Place the bar around the straight edge of the half ring, place the ends flush one over the other. If necessary, fix to each other with textile adhesive or clips. Mark the position of the bar on the outer side of the cube according to the dimensions in the schematic drawing. Place the bar edges on the mark and hammer in 2 rivets next to each other close to the edge. Make sure that the right side of the handle is facing outwards with the rivets. Also fasten the bar on the opposite side of the cube. Before fixing it in place, take particular care that the handle does not twist.



7. Insert the lining cube into the cube right in left (the Non Woven fabric of the lining faces the inside), with the corner seams and the bottom edges placed precisely on top of each other. Fill 2/3 of the lining cube with cherry pits and fill the remaining volume with cotton wool filling.

Tip: If the door stopper is to be used for particularly heavy doors, fill it completely with cherry pits.



8. Fold the cover area of the lining towards the open side of the lining. Slide the seam allowance over the side surface and close with hand stitches. Now fold the ironed seam allowance of the open cover area of the outer cube to the side edge. Close the seam with invisible stitches.

Gütermann GmbH

Landstr. 1

DE- 79261 Gutach-Breisgau

Tel +49 76 81 21-0

contact@guetermann.com

www.guetermann.com